

## JIVA-8215/5915 Series SPECIFICATIONS

SPECIFICATIONS	JIVA-8215	JIVA-5915
Processor	Celeron 2.0 GHz	C3 1.0 GHz
Memory	256 MB, DDR 266 (expandable to 2GB)	128 MB, DDR 266 (expandable to 1GB)
Video memory	16-128 MB shared memory	16-64 MB shared memory
Display	15" TFT 1024x768, 250 nits	
Tilt adjustment	From 17.5° to 76.5°	
Touch sensor	PS/2 resistive panel standard (optional anti-scratch IR RS232 interface)	
Touch resolution	1024x1024, mouse emulation	
<b>Expansion</b>		
Hard disk drive	Build-in 3.5", 40GB	Build-in 3.5", 20GB
FDD	Option for USB interface	
Internal UPS	Yes. (Battery optional)	
Mounting option	Table top or wall mount	
<b>Connectivity</b>		
Audio Line Output	Standard (with 2 speakers)	
VGA Port	1x	
Serial Port	4x	
Parallel Port	1x	
CR Port	1x	
USB Port	2x	
PS/2 KB & MOUSE	YES	
LAN Port	10/100 MHz base Ethernet	
OS Support	Win 2000/XP Pro/WEPOS	
Housing Color	Charcoal	
<b>Physical dimensions</b>		
Dimension	375mm(W) x 282mm(D) x 322-400(H) 14.8" x 11.1" x 12.7-15.7"	
Weight	10.51kg (23.12 lbs. internal power adaptor)	9.92kg (21.82 lbs. internal power adaptor)
Electrical requirements	AC adaptor: Input 100-240V, output DC 12V/150W	AC adaptor: Input 100-240V, output DC 12V/80W
Storage Condition	-20°C ~ +60°C; 10%RH ~ 80%RH; non-condensing; maximum wet bulb 28.9°C	
Operation Condition	0°C ~ +40°C; 20%RH-80%RH; non-condensing; maximum wet bulb 26°C	
Safety Certifications	PSU: UL/VDE/T mark Terminal: FCC, CE (class A)	
<b>Option peripherals</b>		
<b>KP-100</b>	Mini footprint design security keyboard, 40 keys(24 programmable keys and ten key configuration) attachment options: MSR	
Total Keys	40 keys	
Predefined keys	0-9, +, -, ; total 16 keys	
OS support	Win98/2000/XP pro/WEPOS/NT/DOS	
Code Programmable	ASCII or SCAN code	
Programmable capacity	1 to 255 characters per key	
Data Memory	100 years data retention	
Power Source	5V/200 mA max. from the PS/2 KB port	
MSR	ISO 7811 option 2 tracks(1&2 or 2&3), 3 tracks (1,2&3 with software programmable parameter) or JIS II, KB interface	
<b>SD-100</b>	Includes: MSR / iButton reader	
MSR	ISO 7811 option 2 tracks(1&2 or 2&3), 3 tracks (1,2&3) or JIS II	
iButton Reader	Programmed by RS232 interface, output through PS/2 KB or RS232 interface	
<b>SD-200</b>	In USB interface, Includes: MSR / Optical finger print sensor	
MSR	ISO 7811 option 2 tracks(1&2 or 2&3), 3 tracks (1,2&3)	
Finger Print Sensor	Optical type: Detection area: 14.6x18.1 mm / Resolution: 512 dpi x 8 bit gray scale / OS support: Win 98/2000/NT 4.0/XP	
<b>BC-100U</b>	Bar Code Card Reader, USB interface	
LM-6201	12.1" color LCD TFT as second display with rotatable bracket on rear lower base	
PD-2501	2 by 20 VFD customer pole display mounted on rear lower base	
PD-305	2 by 20 LCD low profile customer display mounted on rear lower base	
PD-302	2 by 20 LCD customer display mounted at the back of main display top, RS232 interface	
KB-6000/6200	102 Keys programmable keyboard / 17 programmable keys plus QWERTY keyboard attachment	
CDR	CDR-2300: Slim type internal CD ROM	
DVR	DVR-2000: Slim type internal DVD ROM	

Information and specifications in this catalogue are subject to change without notice.

### Posiflex Incorporated

6, Wu-Chuan Road, Wu-Ku, Taipei Hsien, Taiwan  
 TEL: +886.2.2299.1599 (Rep.) FAX: +886.2.2299.1819/1808  
 posiflex@posiflex.com.tw www.posiflex.com



2006 V01

**POSIFLEX**  
 Your Success Is Our Vision




## Touch Terminal JIVA 8215/5915 Series

State-of-the-Art Scalability for Integrated POS Solutions



## Touch Terminal JIVA 8215/5915 Series

- 15.1" high luminance dual backlit TFT LCD panel
- ELO Accutouch or infrared Touch Sensor
- Integrated UPS functionality protects the system from intermittent power failures
- Spill-resistant architecture
- Power guard feature with software controlled power switch to prevent accidental shutdown of system
- New universal 6-in-1 base stand
  - Internal power adaptor
  - Internal CD/DVD-ROM drive
  - Optional UPS battery
  - Integrated wall mount bracket
  - Rear mount for 2nd display or pole display
  - HDD (secondary for JIVA-5915 and primary for JIVA-8215)

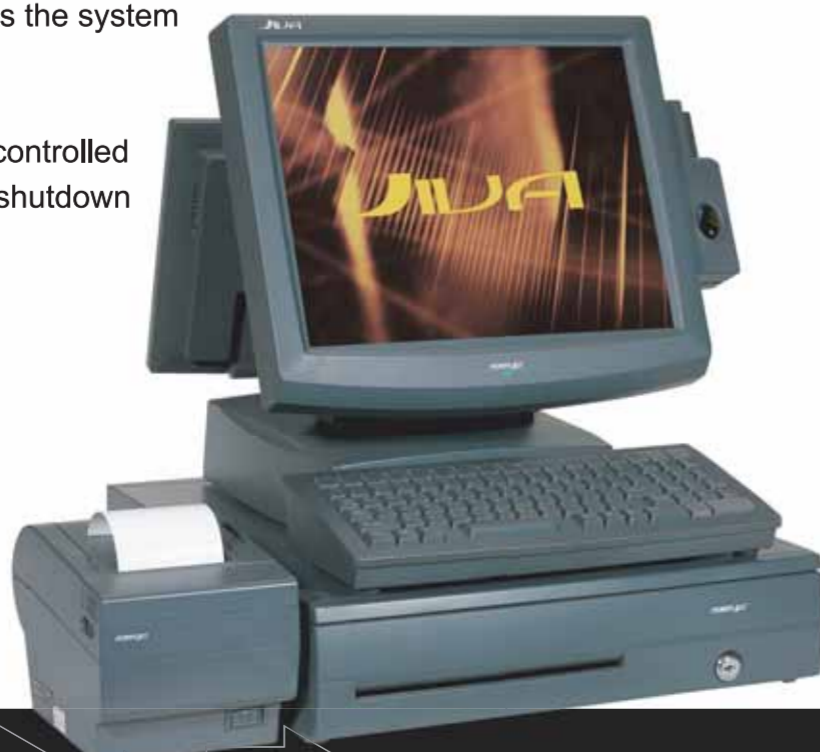

## Features



Interior

Wall Mount



A patented finger release lever "Gear Lock" mechanism easily adjusts the LCD tilt angle from 17.5° to 76.5°



Security lock to prevent unauthorized access to data input/output devices



Integrated secondary 12.1" TFT display for advertisement and promotion on rear lower base (LM-6201)



Customer Pole Display (PD-2501)

## Available peripherals




Integrated 2-in-1 MSR attachment and finger print sensor (SD-200)



Integrated bar-code card reader (BC-100U)



Integrated MSR and 40-Dyna-key programmable keyboard attachment (KP-100)

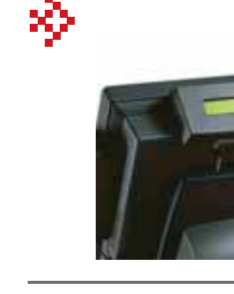

Integrated customer display module mounted to the back of main display (PD-302)



POS Cash Drawer (CR Series)

## Touch Terminal JIVA 8215/5915 Series

Designed for hospitality, retail and vertical markets that require increased performance at the front-end workstation.